




# ASPEN STONE® FIREPIT KIT

Keep the cold nights warm with Grinnell's new Aspen Stone® Firepit. The rough-hewn texture of the Aspen Stone adds natural charm to any outdoor space. Our easy to assemble kit comes pre-packaged with Aspen block, fire bowl, grate, screen, ash tray, poker, and cover.

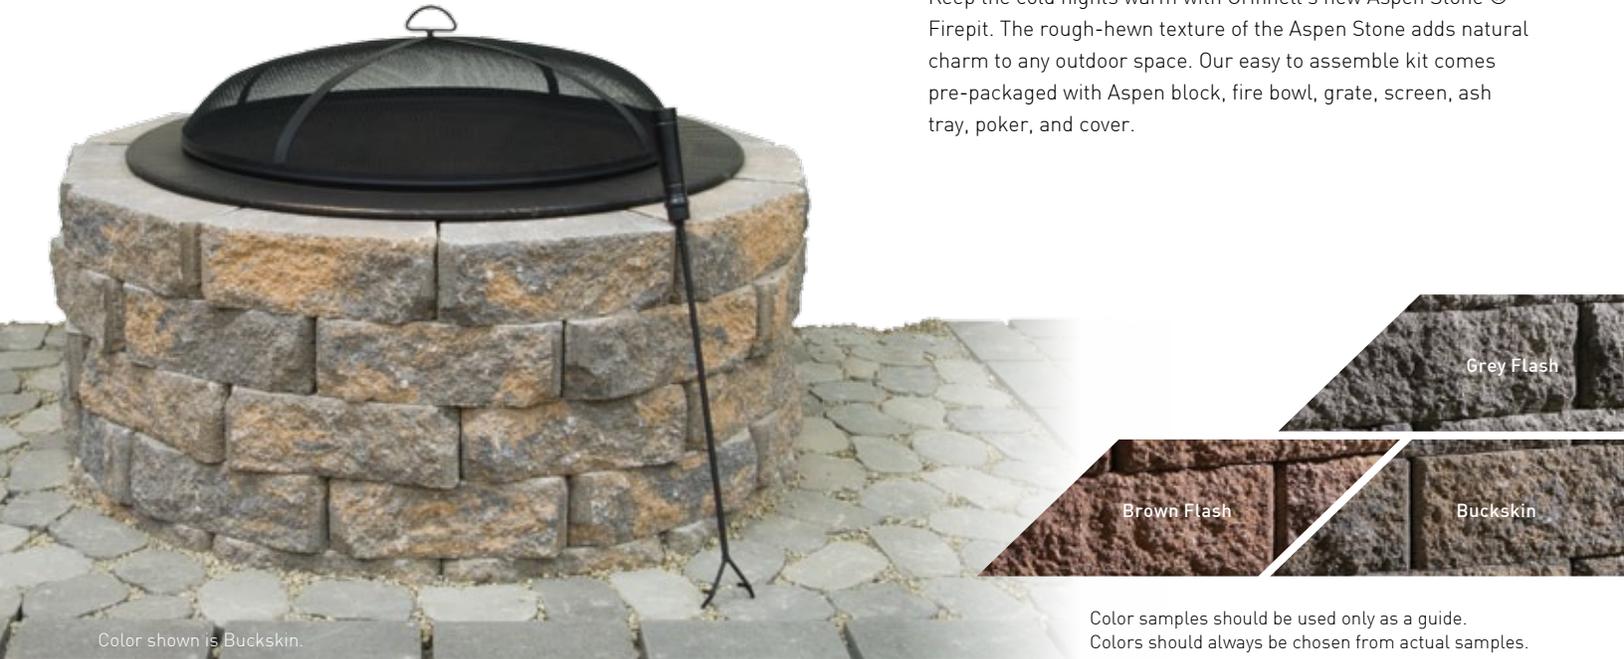

Color shown is Buckskin.

Color samples should be used only as a guide. Colors should always be chosen from actual samples.

## Installation Instructions

### 1. FOUNDATION:

**Compacted Crushed Stone Base:** Place and uniformly compact the crushed stone. Dense-graded aggregate base should be compacted using a vibratory plate compactor or hand tamper. The crushed stone base should extend beyond the Aspen Stone® a min. of 6". For residential use a 4" thick base is recommended. The top of the leveling pad should be at least 2" below grade.

**Concrete Base or Concrete Pavers:** Place Aspen Stone® directly on a concrete base or concrete pavers. Make sure to fill the bottom of the firepit with a layer of sand (3" min.) to ensure proper drainage.

**Installing first Layer of Block:** Use a center stake and lay out the Aspen Stone® in a 14" radius from center stake to the back of the block. A circle with roughly a 28" inside diameter will require 11 Aspen Stone® blocks. There will be small gaps towards the back end of the block for ventilation purposes. Slight adjustment to the circle of blocks may be required for proper alignment.

### 2. BUILDING ADDITIONAL COURSES OF BLOCK:

Make sure the first layer of block is perfectly leveled before building additional courses. Using concrete approved adhesive glue the second row of blocks to the first row. It is important to stagger the joints on every course. The center of each stone in one layer should be above the intersection of the stones below. There are enough stones to build 5 layers of block which would make the firepit roughly 20" tall. For packaging, three extra Aspen Stone® blocks are provided.

### 3. INSTALLATION OF THE FIRE BOWL:

Once the firepit is at the desired height, insert the fire bowl and the log support grill (some models may require removal of additional pieces from the fire bowl rim, a philips head screwdriver is required). Make sure to attach the ash guard to the base of the fire bowl (if provided). All other parts within the box may be discarded. We recommend not gluing the fire bowl to the concrete block. Next place the spark screen on the fire bowl and attach the handle. A poker stick is included to remove or place the spark screen when the firepit is in use. The spark screen handle becomes extremely hot when the firepit is in use. When firepit is not in use please use the included cover to wrap around parameter of the fire bowl.

Grinnell may not be held responsible for any damages, injuries, or fires resulting from the misuse or lack of using the fire dish, log support grill and the spark screen.

**SAFETY TIPS:** The firepit is for outdoor use only. Make sure to assemble the firepit a min. distance from surrounding structures and make sure nothing is directly above the firepit that is a potential fire and/ or injury hazard. Before beginning installation, please contact your municipality to obtain information for firepit installation regulations. It is very important to check local codes!!